

# STAS v-tense & h-tense

## accessories & possibilities

**NEW**

### STAS accessories



**STAS frame clamp  
(4,5 mm)**  
TCS30001

#### **STAS frame clamp (4,5 mm)**

The STAS frame clamp (4.5 mm) can be screwed onto a tensioned wire. When 2 tensioned wires are mounted next to each other with both a STAS frame clamp, a frame or other material (minimal 1 mm and maximal 4.5 mm thick) can be clamped between them.



**STAS frame connector  
(4,5 mm)**  
TCS30002

#### **STAS frame connector (4,5 mm)**

The STAS frame connector (4.5 mm) can be screwed onto a tensioned wire. The double opening allows several frames or other material (minimal 1 mm and maximal 4.5 mm thick) to be placed next to each other.



**STAS tense-frame**  
TCS30010

#### **STAS tense-frame**

The A4 size frame comes with 4 STAS frame clamps (4.5 mm). When 2 tensioned wires are mounted next to each other, the STAS tense frame can be placed between these wires. The frame can be opened at the top so that material can be placed inside. Think, for example, of applications for advertisements or the presentation of houses in real estate. The frame can be closed magnetically.



**STAS frame clamp  
(8,5 mm)**  
TCS30003

#### **STAS frame clamp (8,5 mm)**

The STAS frame clamp (8.5 mm) can be screwed onto a tensioned wire. When 2 tensioned wires are mounted next to each other with both a STAS frame clamp, a frame or other material (minimal 4 mm and maximal 8.5 mm thick) can be clamped between them.



**STAS frame connector  
(8,5 mm)**  
TCS30004

#### **STAS frame connector (8,5 mm)**

The STAS frame connector can be screwed onto a tensioned wire. The double opening allows several frames (minimal 4 mm and maximal 8.5 mm thick) to be placed next to each other.



**STAS shelf clamp  
(8,5 mm)**  
TCS30005

#### **STAS shelf clamp (8,5 mm)**

The STAS shelf clamp can be screwed on the STAS steel cable with glider. When 4 sets of STAS steel cables with glider are mounted with 4 STAS shelf clamps, a STAS shelf can be placed in between to create shelves.



**STAS shelf  
connector (8,5 mm)**  
TCS30006

#### **STAS shelf connector (8,5 mm)**

The STAS shelf connector can be screwed onto the STAS steel cable with glider. Thanks to the double opening, several STAS shelves can be placed next to each other in order to create shelves.



**STAS shelf 20 x 30 cm**  
TCS30025

#### **STAS shelf**

The STAS shelf is a plexiglass shelf of 20 x 30 cm. With the help of 4 STAS shelf clamps, this shelf can be attached to 4 sets of STAS steel cable with glider in order to create shelves. (other dimensions available upon request)



**STAS security hook**  
HA30600

### STAS security hook

The STAS security hook is a hook that can be used with the STAS v-tense. The STAS security hook can be placed before as well as after mounting the tensioned wire by means of a rotary wheel behind the hook.



**STAS signage clip**  
TCS30007

### STAS signage clip

The STAS signage clip can be screwed onto a STAS steel cable with glider and then placed in the STAS qubic. Signs with a minimum thickness of 2 mm and a maximum of 7 mm can be clamped in the STAS signage clip.

\* Can also be used with STAS steel cable with loop and STAS drop ceiling hook.



**STAS metal clips**  
MC10100

### STAS metal clips

These metal clips are suitable for hanging various materials on the STAS h-tense. Think of hanging alphabet letter tiles, posters, drawings, decorations, all kinds of papers and light objects.

## STAS tense LED frame

The A4 size LED frame comes with 4 attached clamps. When 2 tensioned wires are mounted next to each other, the STAS tense LED frame can be placed between the wires. Material can be placed in the frame by removing and replacing a transparent magnetic plate.



**STAS tense led-frame**  
TCS30015

### STAS tense 12V power (60W)

The STAS tense 12V power is an adapter that can be used to power the STAS tense LED frame with 60W power. A maximum of 12 LED frames\* can be connected to this adapter.

\* max. 12 LED frames connected on 2 tensioned wires. If you want to use more than 12 LED frames and / or more than 2 tensioned wires, it is necessary to use multiple adapters.



**STAS tense 12V power**  
VT30600

## Applications




**STAS frame clamp**  
(4,5 mm)



**STAS frame connector**  
(4,5 mm)




**STAS frame clamp**  
(8,5 mm)



**STAS frame connector**  
(8,5 mm)



**STAS shelf clamp**  
(8,5 mm)



**STAS shelf connector**  
(8,5 mm)



**STAS signage clip**

# STAS v-tense & h-tense accessories & options

NEW

## Options STAS v-tense




STAS qubic, STAS v-tense, STAS tense frame & STAS frame clamps

STAS qubic, STAS v-tense, STAS tense frame & STAS frame clamps

STAS qubic, STAS v-tense, STAS evoluon, STAS tense frame & STAS frame clamps

STAS evoluon, STAS v-tense, STAS security hook & STAS kliq frame

## Options STAS signage clip

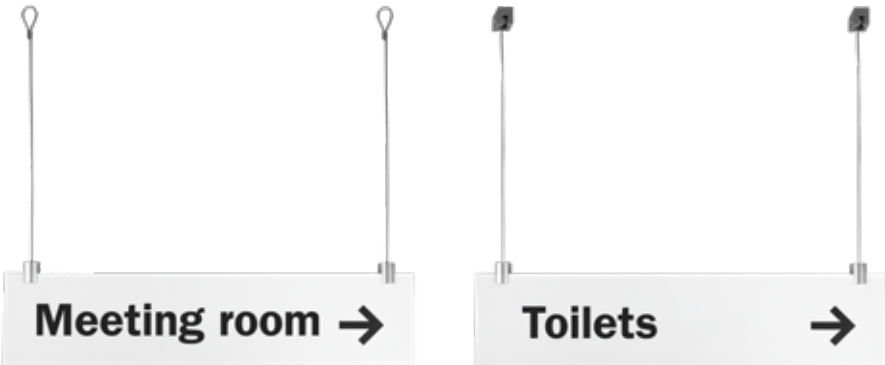

STAS signage clip & steelcable with loop.  
(to be used with the STAS suspended ceiling hook with loop)

STAS signage clip, steelcable with glider & STAS qubic.






STAS cliprail, STAS qubic,  
STAS v-tense  
STAS security hook &  
decorative photo frames



STAS j-rail, STAS v-tense,  
STAS frame clamps &  
presentation board

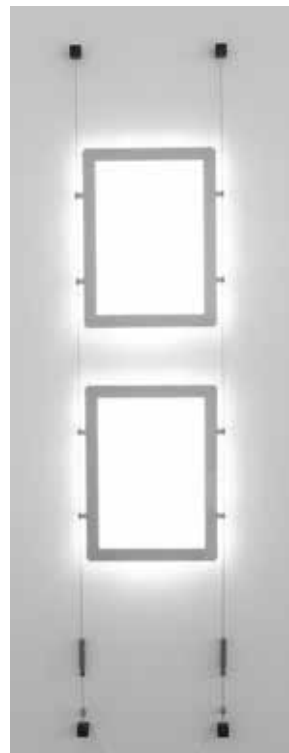

STAS qubic, STAS  
v-tense  
& STAS tense LED  
frame



STAS qubic ceiling  
mounting, STAS shelf  
clamp  
& STAS shelves



## Options STAS h-tense



STAS h-tense, STAS qubic, STAS metal clips, letter cards



STAS h-tense, STAS qubic, STAS tense frame & STAS frame clamps